

THE COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington, DC 20231

Docket: JA9-98-073  
PATENT

A

Transmitted herewith for filing is the Patent Application of

Inventor: Noboru Aoyama

FEED ASSISTANCE MEMBER AND A MEDIUM PROCESSING APPARATUS

Enclosed with the Patent Application are:

- ☒ Six (6) sheet(s) of Formal drawing(s)
- ☒ A Declaration and Power of Attorney
- ☒ Information Disclosure Statement (PTO Form 1449)
- ☒ A certified copy of a Japanese application.

The filing fee has been calculated as shown below:

(Col. 1)		(Col. 2)	OTHER THAN A SMALL ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 760.00
TOTAL CLAIMS	1 - 20	= 0	x 18 =	\$
INDEP. CLAIMS	1 - 3	= 0	x 78 =	\$
MULTIPLE DEPENDENT CLAIM PRESENTED			+260 =	\$
*If the difference in Col. 1 is less than "0", enter "0" in Col. 2			TOTAL	\$ 760.00

☒ Please charge my Deposit Account No. 09-0466 in the amount of \$760.00.  
A duplicate copy of this sheet is attached.

☒ The Commissioner is hereby authorized to charge payment of the following fees  
associated with this communication or credit any overpayment to Deposit  
Account 09-0466. A duplicate copy of this sheet is attached.

- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 37 CFR 1.17.


**EXPRESS MAIL CERTIFICATE**

I hereby certify that the above paper/fee is  
being deposited with the United States Postal  
Service "Express Mail Post Office to Addressee"  
service under 37 CFR 1.10 on the date indicated  
below and is addressed to the Commissioner of  
Patents and Trademarks, Washington, DC 20231.

"Express Mail" no.: **EM507215217US**  
Date of Deposit: August 18, 1999  
Person mailing paper/fee: **Rosalind Kennison**

Signature Rosalind Kennison

Respectfully submitted,

  
Joseph F. Villella, Jr.  
(#30,599)  
Attorney for Applicant  
Telephone (408) 256-2650  
IBM Corporation  
Intellectual Property Law  
5600 Cottle Road (L2PA/0142)  
San Jose, CA 95193

FEED ASSISTANCE MEMBER AND A MEDIUM  
PROCESSING APPARATUS

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an apparatus for feeding a medium, such as paper, in a medium processing device such as a printer. More particularly, the present invention relates to an improved apparatus for increasing the precision in a feed operation of the medium through the medium processing device.

Background Art

As is disclosed in US Patent 5,088,848 (assigned to Olivetti), shown in Fig. 5, the correction of position of an inserted medium is made by running the edges of the medium against a left guide 171, and shutters 121, 123, 125 and 127. Then the medium is fed into the processing device, such as a printer. Fig. 5 is a plan view of a portion of the medium processing device 100 parallel to a feed path.

In this approach, the medium 200 is inserted, and when an IN sensor (an insertion sensor) 163 is turned on, a rotation of an align roller 151 arranged in a lateral direction and align rollers 141 and 143 arranged in a vertical direction is initiated.

The align roller 151 feeds the medium in a leftward direction, and the align rollers 141 and 143 feed the medium in a forward direction. The shape of these two kinds of rollers is oval rather than circular, as shown in cross section A-A and cross section B-B. These rollers contact with idlers 145 and 153, respectively, for each rotation of 180 degrees. The idlers 145 and 153 are applied with a bias force such as a spring in a direction toward the align rollers so that a proper feed force or a feed power (a force for sustaining the feed operation) is generated.

The top of the align roller 151 is shifted from the tops of the align rollers 141 and 143 by 90 degrees, as shown in Fig. 5, to alternately feed the medium incrementally toward the leftward direction and then in the forward direction. That is, when one, such as the align roller 151, feeds the medium, the other, such as align rollers 141 and 143, does not disturb the feed operation of the align roller 151. When align sensor 165 is turned off, align roller 151 is operated, and when align sensor 165 is turned on, align roller 151 is stopped. When align sensor 161 is turned off, align rollers 141 and 143 are operated, and when align sensor 161 is turned on, align rollers 141 and 143 are stopped. Finally, medium 200 is stopped by the left guide 171 and shutters 121, 123, 125 and 127.

As shown in Fig. 7, when both align sensors 161 and 165 are turned on, the correction of position is considered to be

completed, and align rollers 141, 143 and 151 are stopped. Then the shutters 121, 123, 125 and 127 are opened, and the medium is fed into the inside of the processing device by feed rollers 131 and 133, and a process, such as a print operation or a character recognition operation, is performed.

However, when the medium is very thin, or the surface of the medium is very smooth, a sufficient friction force between a back surface of the medium and a surface of a plate for supporting the medium is not generated. Accordingly, when the oval shaped align rollers 141, 143 and 151 do not contact the idlers 145 and 153, the inertia force of the medium 200 driven by the previous contact with the align rollers 141, 143 and 151 becomes larger than the friction force of the surface of the medium, so that an overrun of the medium 200 occurs. As a result, when the medium 200 runs against the left guide 171 or the shutters 121, 123, 125 and 127, a bounce back of the medium 200 occurs, so that a proper correction of position of the medium becomes impossible.

One approach to solve this problem is to decrease the inertia force of the medium to the same strength as the friction force of the medium by either decreasing the rotational speed of the align rollers 141, 143 and 151 or by using align rollers with a smaller diameter so as to decrease the amount of movement of the medium. This alternative approach, however, increases the time for processing the medium to an unacceptable level.

Accordingly, one object of the present invention is to provide a mechanism for feeding a medium at a high speed which is not affected by a physical characteristic, such as thinness or smoothness, of the medium.

5 Another object of the present invention is to provide a mechanism for realizing a high speed correction of position of the medium which is not affected by a physical characteristic of the medium.

10 Still another object of the present invention is to provide a feed mechanism for decreasing a shear force or a tension force applied to the medium to as small a value as possible.

15 Another object of the present invention is to provide an improved feed mechanism in which production cost is low and the number of fabrication steps are decreased to a minimum.

## SUMMARY OF THE INVENTION

In the present invention, a weight idler is mounted for causing a proper frictional force to be generated on a medium, such as paper, that is being fed in a printer or similar paper handling devices. In one aspect of the present invention, the weight idler can move in a direction along a thickness of the medium to absorb a variation of the thickness of the medium. When the medium is inserted, the weight idler rides on the medium to cause a proper frictional force to be generated between the medium and a surface of a plate that supports the medium being fed. In this manner, an overrun of the medium caused by the feed operation of the rollers of a non-circular cross section is prevented.

In one aspect of the present invention, a feed assistance member is arranged in the feed path of a medium to be processed in a medium processing apparatus, the feed path including a roller of non-circular cross section for feeding the medium. The feed assistance member includes a roller portion and a shaft portion. The shaft portion of the feed assistance member is supported in a bracket so as to move by the thickness of the medium. The roller portion of the feed assistance member contacts the medium being fed to increase the frictional force that is generated on the medium.

The medium processing apparatus according to the present invention includes, but is not limited to, such apparatus as a

printer, a facsimile device, a copying machine, and a character recognition device.

Another aspect of the present invention is a feed assistance member arranged in a feed mechanism including a feed member, the feed power of which changes during the feed of a medium, such as paper. Such feed assistance member contacts the medium being fed in a manner so as to increase the frictional force generated on the medium with the feed assistance member being arranged so as to move by the thickness of the medium.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows one embodiment of the medium processing device of the present invention;

5 Fig. 2 shows the feed assistance member in the preferred embodiment of the present invention;

Fig. 3 shows the feed assistance member in the preferred embodiment of the present invention;

10 Fig. 4 shows the feed assistance member in the preferred embodiment of the present invention;

Fig. 5 shows an existing medium processing device;

Fig. 6 shows the operation of an existing medium processing device; and

15 Fig. 7 shows the further operation of the existing medium processing device.



## DESCRIPTION OF PREFERRED EMBODIMENT

Fig. 1 shows one embodiment of the medium processing device 100 of the present invention. Fig. 1 is a plan view of a portion of the medium processing device 100 parallel to a feed path. As shown in Fig. 1, a weight idler 110 is provided at a position above the medium to be processed when the medium is fed by align rollers 141, 143 and 151. The weight idler 110 in the preferred embodiment of the present invention contacts a surface of a back plate supporting the medium 200 (see Fig. 6) by its weight. When the medium 200 is inserted, the weight idler 110 rides on the medium 200 to act as a follower roller.

The reason for using the follower roller as a feed assistance member for stabilizing the feed of the medium in the preferred embodiment of the present invention is: (i) to prevent a local shearing force and a tension from being generated on the medium; (ii) to prevent the medium from being damaged and to prevent the desired feed of the medium from being obstructed; and, (iii) to cause the follower roller to easily ride on the medium.

Accordingly, the feed assistance member of the present invention can be realized by various members if such members have the characteristic that: can prevent the local shearing force and tension from being generated on the medium; can prevent the medium from being damaged; can prevent the desired feed of the

medium from being obstructed; and, cause the follower roller to easily ride on the medium. For example, the feed assistance member can be a non-rotatable member of a hemispherical shape having a low surface friction rather than a roller.

5 In the preferred embodiment of the present invention, the weight roller 110 is mounted between the align rollers 141, 143 and 151 and the point at which medium 200 is inserted into medium processing device 100. The axis of the weight roller 110 is aligned in a perpendicular direction to the feed direction or the  
10 vertical direction of the medium 200 to cause the weight idler 110 to easily ride on the medium 200 fed in the vertical direction.

Figs. 2, 3 and 4 are a plan view, a side view and a perspective view, respectively, of the weight idler 110 in the preferred embodiment of the present invention. As shown in these  
15 figures, the weight idler 110 in the preferred embodiment of the present invention comprises a weight idler shaft 111, a weight idler roller 113 and weight idler brackets 115 and 117.

The structure of the weight idler brackets 115 and 117 is such as to always move the weight idler shaft 111, held in open  
20 ended grooves, in the vertical direction, that is, in the direction along the thickness of medium 200, to the surface of the back plate supporting the medium being fed. In this manner, the total weight of the weight idler roller 113 and the weight  
25 idler shaft 111 is applied onto medium 200 even if the weight

idler roller 113 is moved up and down in the vertical direction due to the thickness of the medium.

A spring may also be used for urging the weight idler onto the medium. In this case, the weight idler shaft 111 would be prevented from being locked on an upper portion of the open ended grooves of the weight idler brackets 115 or 117. If such undesired lock occurs, the weight idler 110 cannot perform its designed function. However, when a relatively thick medium 200 is inserted, the spring is additionally pressed, whereby an additional force due to the pressed spring is applied to medium 200. The frictional force thus generated between the lower surface of the medium 200 and the surface of the back plate is increased since the additional force is added to the weight of the medium. Such application of this additional force may cause a problem in some circumstances by limiting the feed of medium 200.

For example, in the case of a passbook printer used in the banking industry, the weight of the lightest paper is about 1 gram for B6 size, and the weight of the heaviest passbook is about 20 grams. If the weight of the movable members of the weight idler 110 is 4 grams, an apparent weight of the 1 gram paper becomes 5 grams (5 times), and hence the effect for suppressing the over run of the paper is large. But, in the case of the passbook, the increase of the weight is 20%, and hence the effect is small.

Desirable material for the surface of the weight idler roller is a material, such as polyacetal, nylon, or Teflon which generates a small friction with the medium at the feed operation of the medium, and does not generate a transfer of ink from the medium, which is ejected after the print operation, to the weight idler roller.

As described above, the present invention realizes the mechanism which can perform the high speed correction of position and the feed of the medium without being affected by the physical characteristic of the medium.

## CLAIMS

1. A feed assistance apparatus arranged in a feed path of  
a medium to be processed in a medium processing apparatus, said  
5 feed path including a roller of non-circular cross section for  
feeding said medium, said feed assistance apparatus comprising:

a roller portion contacting said medium being fed to  
increase a frictional force generated on said medium; and,

a shaft portion supported in a bracket so as to move by the  
10 thickness of said medium.

ABSTRACT OF THE DISCLOSURE

The present invention describes a mechanism which can perform high speed correction of position and feed of a medium such as paper without being affected by the physical characteristic of the medium.

A weight idler is mounted in a position of an upper stream in a feed path in a medium processing apparatus for causing a proper frictional force to be generated on a medium being fed.

In one aspect of the present invention, the weight idler can move in a direction along a thickness of the medium to absorb the thickness of the medium. When the medium is inserted, the weight idler rides on the medium to cause a proper frictional force to generate on the medium so as to prevent an overrun of the medium caused by the feed operation of rollers having a non-circular cross section.

FIG.1

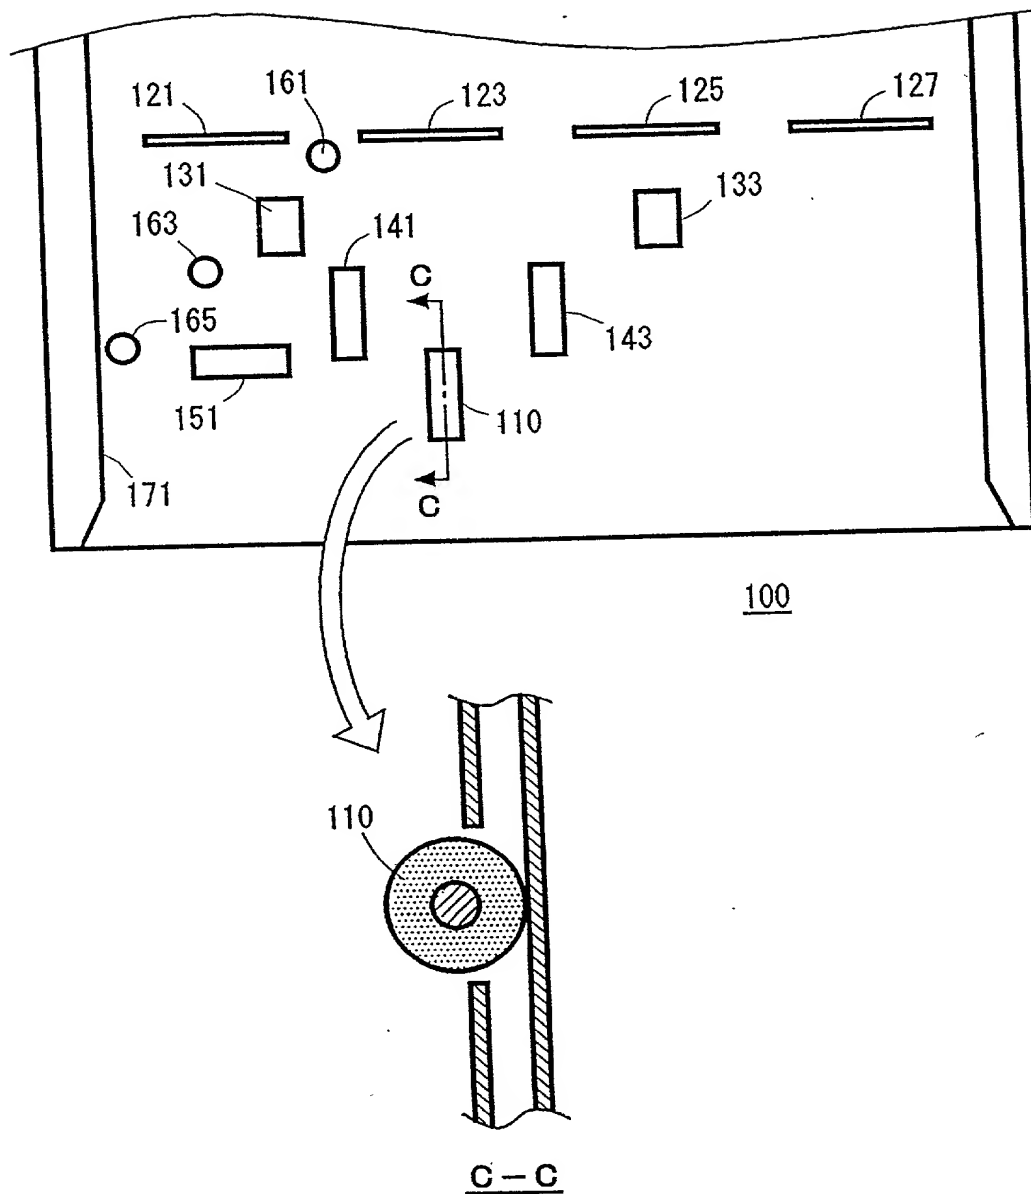


FIG.2

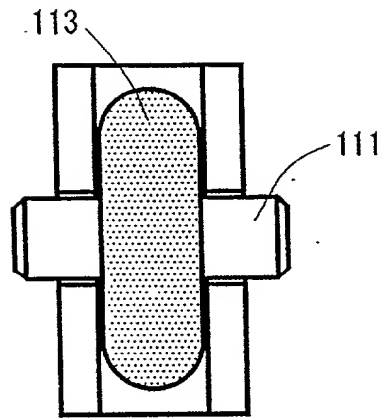


FIG.3

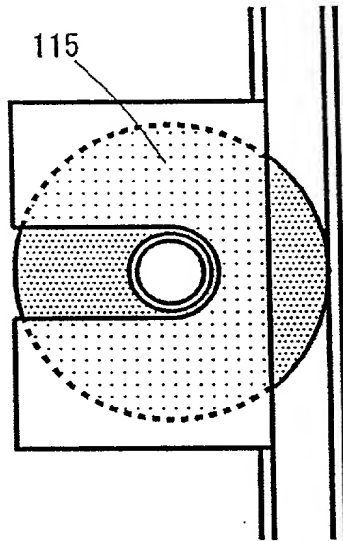




FIG.4

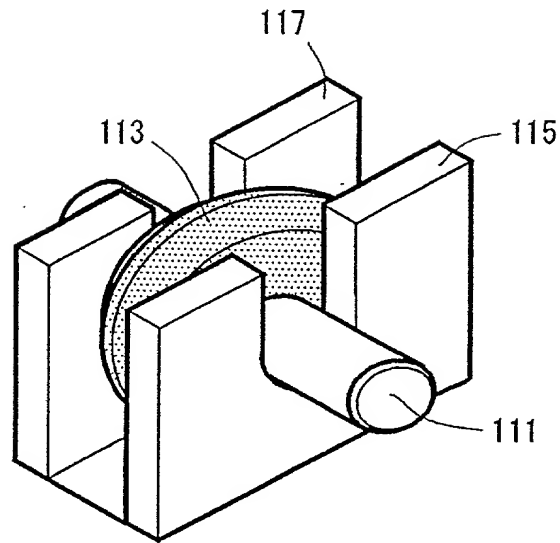


FIG.6



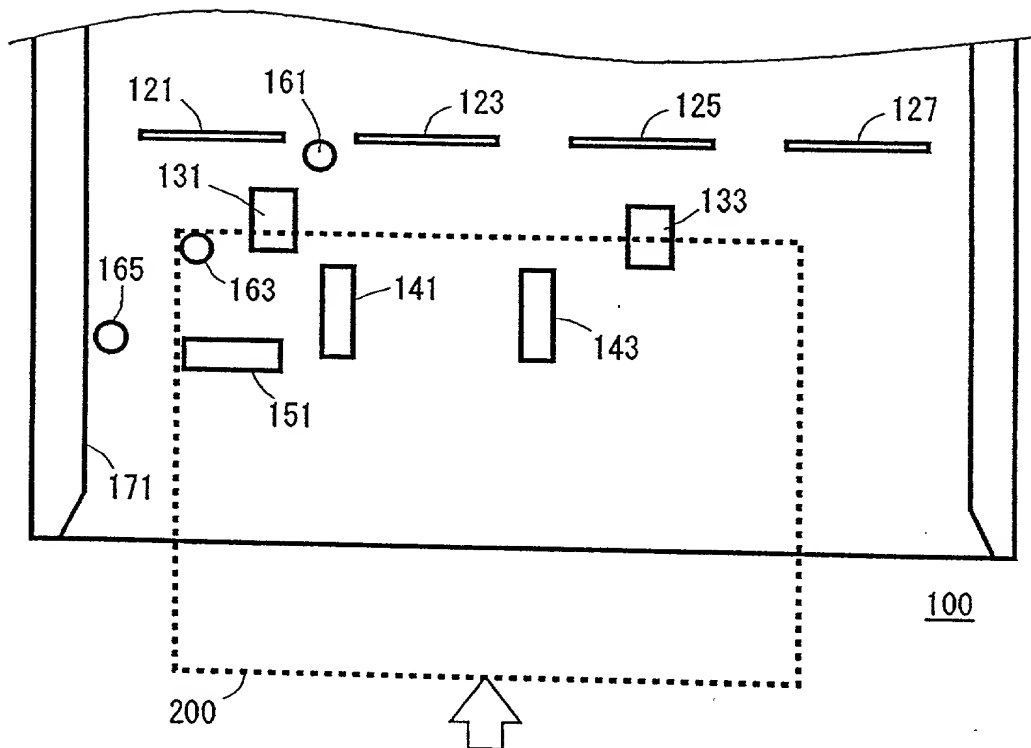


FIG.5

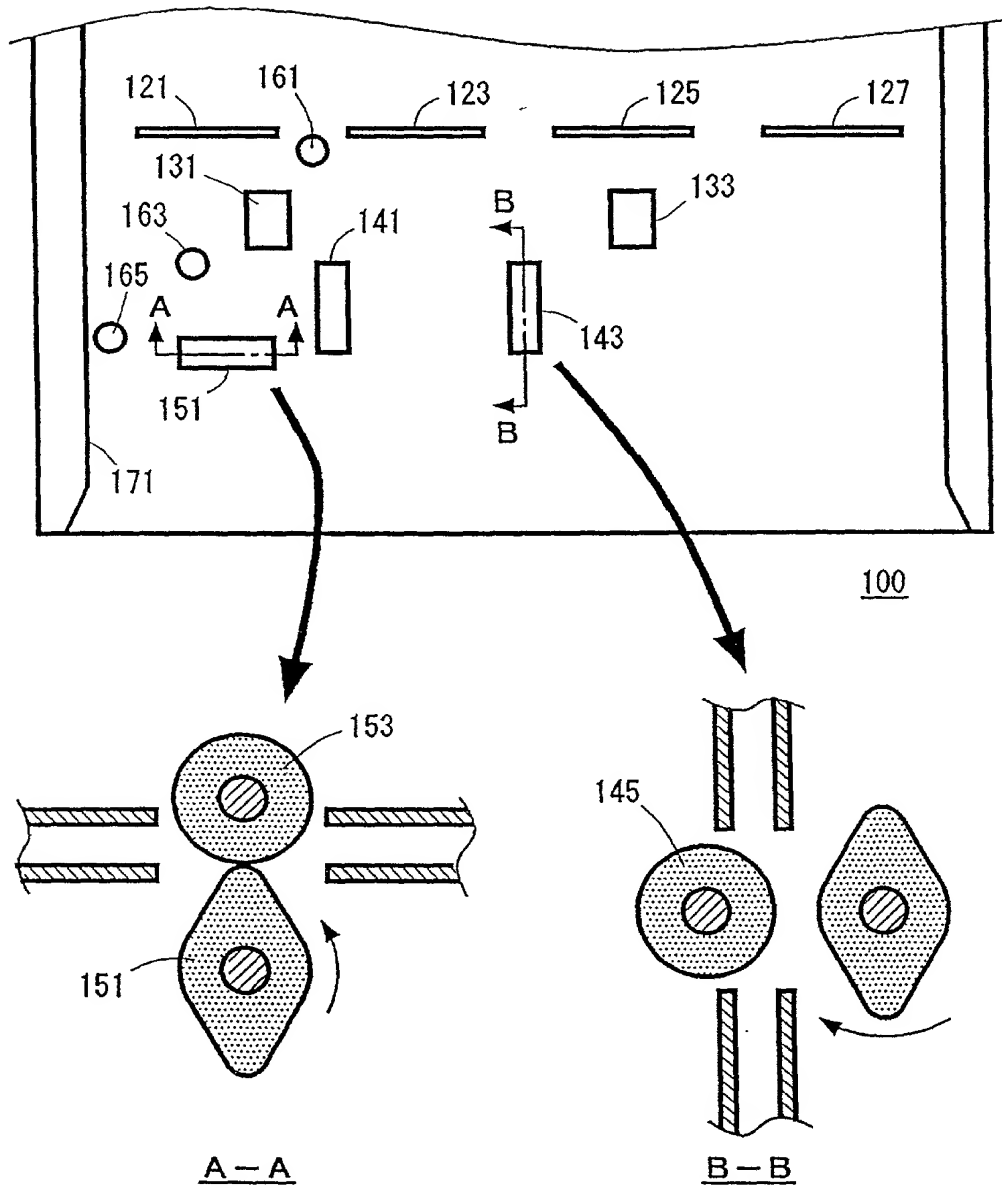

668T20 1593260

FIG.7

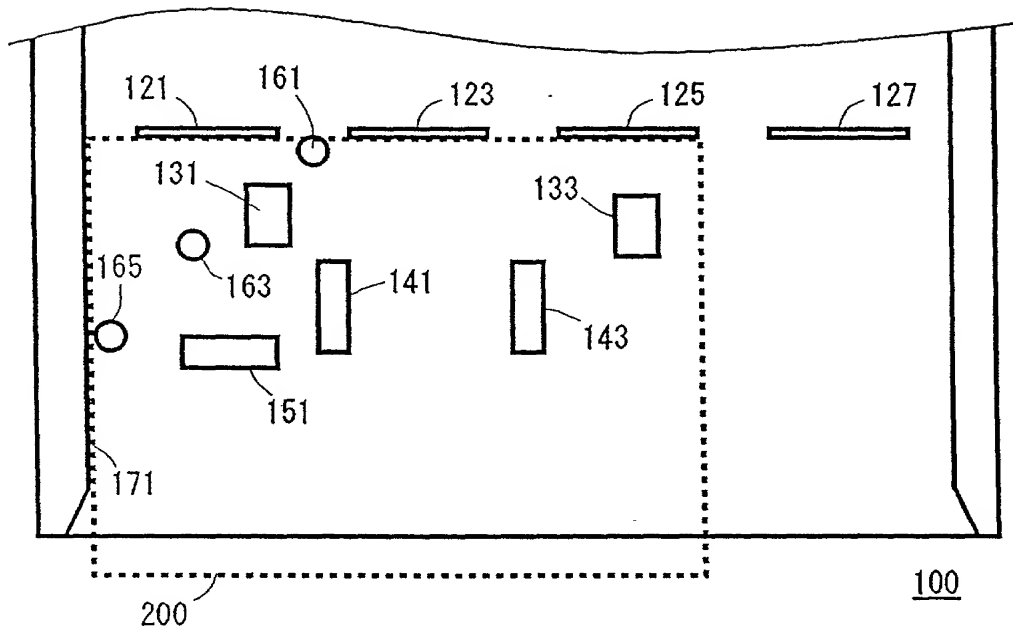

00376551.001899  
00000000.000000

FIG.8


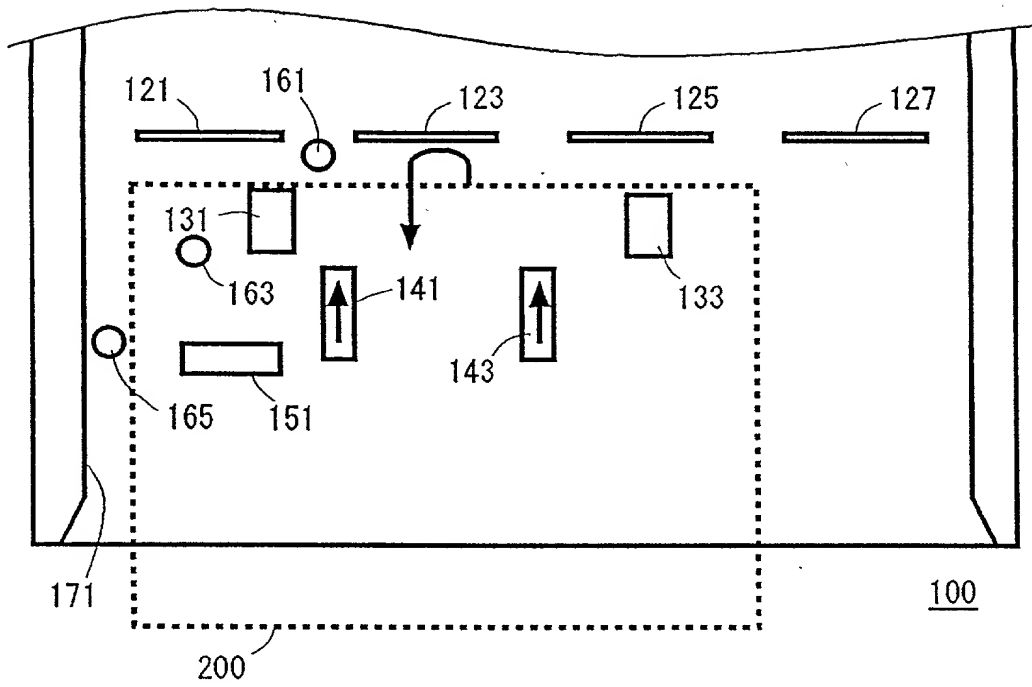


FIG.9

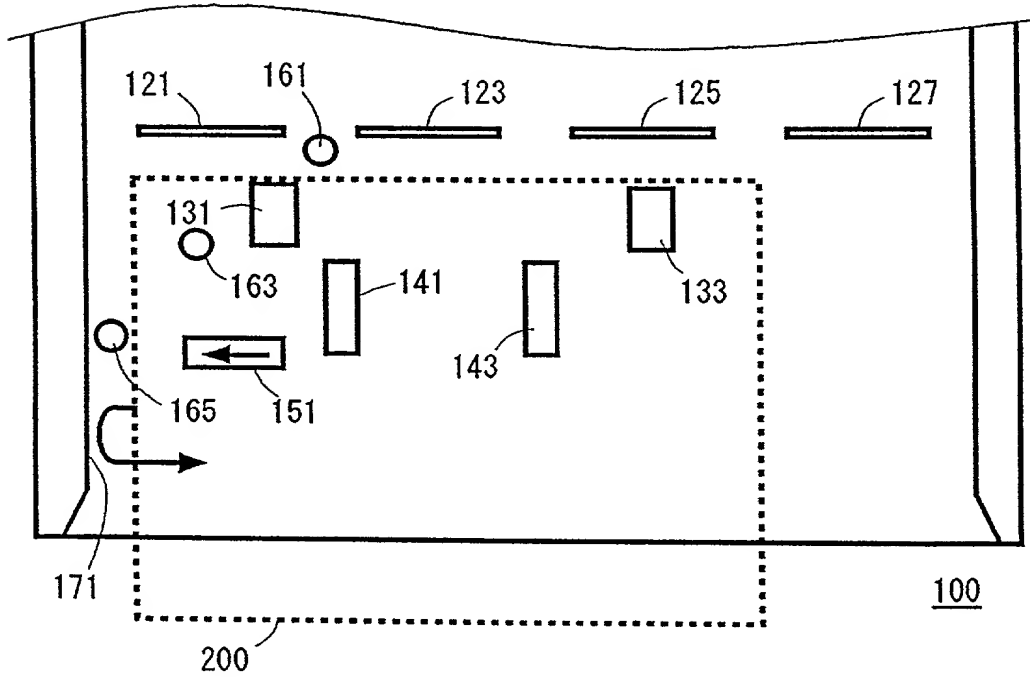

66760 799260

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**FEED ASSISTANCE MEMBER AND A MEDIUM PROCESSING APPARATUS**

the specification of which (check one)

  X   is attached hereto.  
       was filed on \_\_\_\_\_  
       as Application Serial No. \_\_\_\_\_  
       and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed
<u>10-231248</u> (Number)	<u>Japan</u> (Country)
	<u>18/08/1998</u> (Day/Month/Year Filed)
	<u>  X  </u> Yes <u>      </u> No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56, which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>None</u> (Application Serial No.)	<u>      </u> (Filing Date)	<u>      </u> (Status) (patented, pending, abandoned)
---	--------------------------------	--

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Joseph F. Villella, Jr. (#30,599)  
William D. Gill (#44,124)  
G. Marlin Knight (#33,409)  
Paik Saber (#37,494)  
Christopher A. Hughes (#26,914)  
John E. Hoel (#26,279)  
Robert B. Martin (#26,945)

Philip R. Wadsworth (#29,219)  
Esther E. Klein (#34,337)  
Douglas R. Millett (#31,784)  
Noreen A. Krall (#39,734)  
Edward A. Pennington (#32,588)  
Joseph C. Redmond, Jr. (#18,753)  
Randall J. Bluestone (#40,518)

Send correspondence to:

Joseph F. Villella, Jr.  
IBM Corporation  
Intellectual Property Law  
5600 Cottle Road (L2PA/0142)  
San Jose CA 95193

Direct Telephone Calls to: (name and telephone number) Joseph F. Villella, Jr., (408) 256-2650

Full name of sole or first joint-inventor: Noboru Aoyama

Inventor's signature:

Date:

Residence: 129-14, Shimomizo, Sagamihara-shi, Japan

Citizenship: Japanese

Post Office Address: Same